


D1301 PL-07



Type: Dynamic, Moving coil.
 Freq. response: 40 to 16.500 Hz
 Polar Pattern: Cardioid
 Sensitivity (1000 Hz): 1,7 mV/Pa*
 (*1 Pa = 94 dB SPL)
 Max. SPL: 137 dB
 Impedance: 600 Ohm
 Power supply: none
 Connector: 3p. XLR (male-type)
 Dimensions: Ø 32 mm x L 157 mm
 Net. Weight: 0,245 kg

Frequency Diagram

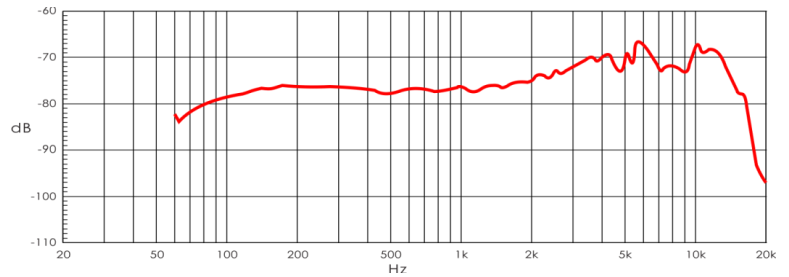


D1302 PL-07B



Type: Dynamic, moving coil.
 Freq. response: 50 to 16,000 Hz
 Polar Pattern: Cardioid
 Sensitivity (1000 Hz): 2,6 mV/Pa*
 (*1 Pa = 94 dB SPL)
 Max. SPL: 137 dB
 Impedance: 600 Ohm
 Power supply: none
 Connector: 3p. XLR (male-type)
 Dimensions: Ø 42 mm x L 160 mm
 Net. Weight: 0,271 kg

Frequency Diagram

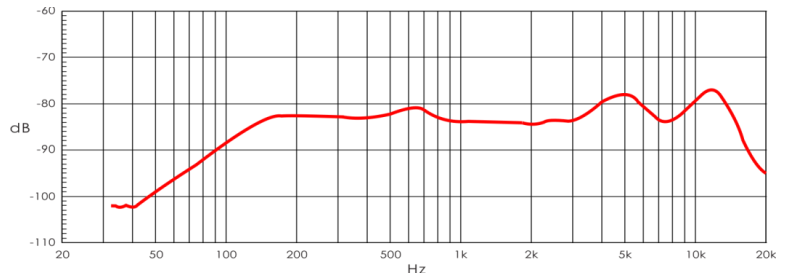


D1303 PL-08



Type: Dynamic, moving coil.
 Freq. response: 50 to 16.500 Hz
 Polar Pattern: Cardioid
 Sensitivity (1000 Hz): 1,8 mV/Pa*
 (*1 Pa = 94 dB SPL)
 Max. SPL: 137 dB
 Impedance: 600 Ohm
 Power supply: none
 Connector: 3p. XLR (male-type)
 Dimensions: Ø 51 mm x L 160 mm
 Net. Weight: 0,315 kg

Frequency Diagram

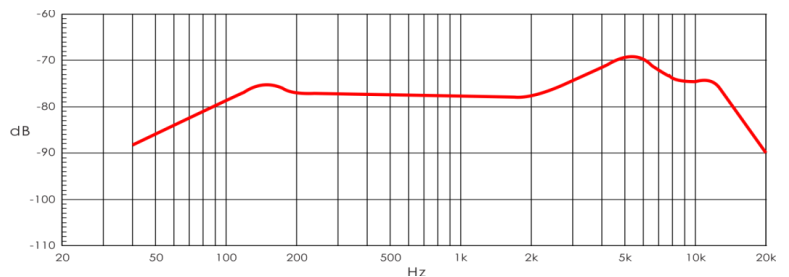


D1304



Type: Dynamic, Moving coil.
 Freq. response: 50 to 16.500 Hz
 Polar Pattern: Cardioid
 Sensitivity (1000 Hz): 1,8 mV/Pa*
 (*1 Pa = 94 dB SPL)
 Max. SPL: 137 dB
 Impedance: 600 Ohm
 Power supply: none
 Connector: 3p. XLR (male-type)
 Dimensions: Ø 51 mm x L 160 mm
 Net. Weight: 0,298 kg

Frequency Diagram

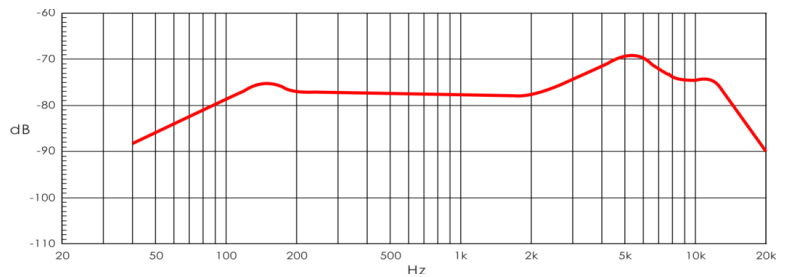

D1305 PL-08B



Type: Dynamic, moving coil.
 Freq. response: 50 to 16.000 Hz
 Polar Pattern: Cardioid
 Sensitivity (1000 Hz): 2,9 mV/Pa*
 (*1 Pa = 94 dB SPL)
 Max. SPL: 137 dB
 Impedance: 600 Ohm
 Power supply: none
 Connector: 3p. XLR (male-type)
 Dimensions: Ø 51 mm x L 160 mm
 Net. Weight: 0,28 kg

Frequency Diagram

