



HM-30

ORDERCODE D1380



SHOWELECTRONICS FOR PROFESSIONALS



© 2011 Dap Audio.

DAP Audio

DAP Audio HM-30 Product Guide

Warning	2
Unpacking Instructions	2
Safety-instructions	3
Operating Determinations	3
Return Procedure	3
Claims	3
Description	4
Features	4
Overview	4
Set Up and Operation	5
Frequency and Polar patterns	5
Connection Cables	5
Maintenance	6
Product Specifications	7

WARNING

**FOR YOUR OWN SAFETY, PLEASE READ THIS USER MANUAL CAREFULLY
BEFORE YOUR INITIAL START-UP!**

Unpacking Instructions

Immediately upon receiving this product, carefully unpack the carton and check the contents to ensure that all parts are present, and have been received in good condition. Notify the dealer immediately and retain packing material for inspection if any parts appear damaged from shipping or the carton itself shows signs of mishandling. Save the carton and all packing materials. In the event that a fixture must be returned to the factory, it is important that the fixture be returned in the original factory box and packing.

Your shipment includes:

- DAP HM-30
- Wooden storage box
- Stand mount
- User Manual

 **CAUTION!** 
Keep this system away from rain and moisture!

SAFETY INSTRUCTIONS

Every person involved with the installation, operation and maintenance of this system has to:

- be qualified
- follow the instructions of this manual

 **CAUTION! Be careful with your operations.** 
**With a dangerous voltage you can suffer
a dangerous electric shock when touching the wires!**

Before you initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the system.

To maintain perfect condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this manual.

Please consider that damages caused by manual modifications to the system are not subject to warranty.

This system contains no user-serviceable parts. Refer servicing to qualified technicians only.

IMPORTANT:

The manufacturer will not accept liability for any resulting damages caused by the non-observance of this manual or any unauthorized modification to the system.

- Make sure the phantom power of your Mixer's channel is switched off.
- Never remove warning or informative labels from the unit.
- Do not open the device and do not modify the device.
- Only use system indoor, avoid contact with water or other liquids.
- Avoid flames and do not put close to flammable liquids or gases.
- Make sure you don't use the wrong kind of cables or defective cables.
- Make sure that the signals to the mixer are balanced, otherwise hum could be created.

- Don't put your equipment next to TV, radio, etc., because of interference or distortion.
- Please read this manual carefully and keep it for future reference. Remember that the device has a better value on the market, if you save the carton and all packing materials.
- If your Dap Audio device fails to work properly, discontinue use immediately. Pack the unit securely (preferably in the original packing material), and return it to your Dap Audio dealer for service.
- If the device has been exposed to drastic temperature fluctuation (e.g. after transportation), do not switch it on immediately. The arising condensation water might damage your system. Leave the system switched off until it has reached room temperature.
- Repairs, servicing and electric connection must be carried out by a qualified technician.

OPERATING DETERMINATIONS

If this system is operated in any other way, than the one described in this manual, the product may suffer damages and the warranty becomes void.

Any other operation may lead to dangers like short-circuit, burns, electric shock, etc.

You endanger your own safety and the safety of others!

Improper installation can cause serious damage to people and property !

Return Procedure

Returned merchandise must be sent prepaid and in the original packing, call tags will not be issued. Package must be clearly labeled with a Return Authorization Number (RMA number). Products returned without an RMA number will be refused. Highlite will not accept the returned goods or any responsibility. Call Highlite 0031-455667723 or mail offersales@highlite.nl and request an RMA prior to shipping the fixture. Be prepared to provide the model number, serial number and a brief description of the cause for the return. Be sure to properly pack fixture, any shipping damage resulting from inadequate packaging is the customer's responsibility. Highlite reserves the right to use its own discretion to repair or replace product(s). As a suggestion, proper UPS packing or double-boxing is always a safe method to use.

Note: If you are given an RMA number, please include the following information on a piece of paper inside the box:

- 1) Your name
- 2) Your address
- 3) Your phone number
- 4) A brief description of the symptoms

Claims

The client has the obligation to check the delivered goods immediately upon delivery for any shortcomings and/or visible defects, or perform this check after our announcement that the goods are at their disposal. Damage incurred in shipping is the responsibility of the shipper; therefore the damage must be reported to the carrier upon receipt of merchandise.

It is the customer's responsibility to notify and submit claims with the shipper in the event that a fixture is damaged due to shipping. Transportation damage has to be reported to us within one day after receipt of the delivery.

Any return shipment has to be made post-paid at all times. Return shipments must be accompanied with a letter defining the reason for return shipment. Non-prepaid return shipments will be refused, unless otherwise agreed in writing.

Complaints against us must be made known in writing or by fax within 10 working days after receipt of the invoice. After this period complaints will not be handled anymore.

Complaints will only then be considered if the client has so far complied with all parts of the agreement, regardless of the agreement of which the obligation is resulting.

Description of the device

Features

The DAP HM-30 is a successor of the legendary crystal-type microphones used for blues-harp. Now, using latest microphone technology and very fine machining.

- Stand mount included
- Wooden storage box included

Overview





Set Up and Operation

Set all volume and gain controls on your mixer, mic preamp or recording device are at their minimum settings before connecting the microphone. **Make sure the phantom power is turned off!**

Once the HM-30 is plugged in, move the channel fader gradually to the 0dB position adjust the input gain using your channel peak led or VU-meter.

Frequency and polar patterns

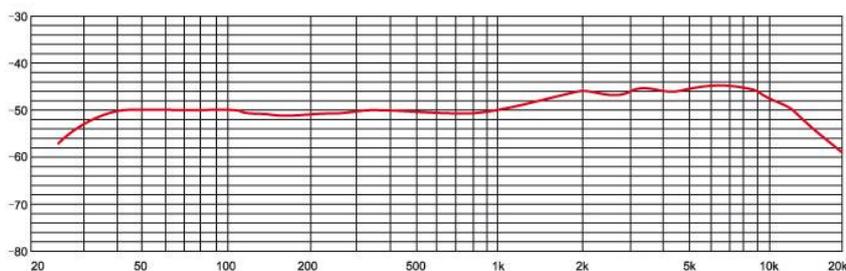

Hyper Cardioid at 1kHz


Connection Cables

Take care of the connector cables, always holding them by the connectors and avoiding knots and twists when coiling them: This gives the advantage of increasing their life and reliability. Periodically check that your cables are in good condition, that they are correctly wired and that all their contacts are in good condition: a great number of problems (faulty contacts, ground hum, discharges, etc.) are caused entirely by using unsuitable or faulty cables.



Headphones

Unbalanced mono 1/4" jack plug

Balanced mono 1/4" jack plug

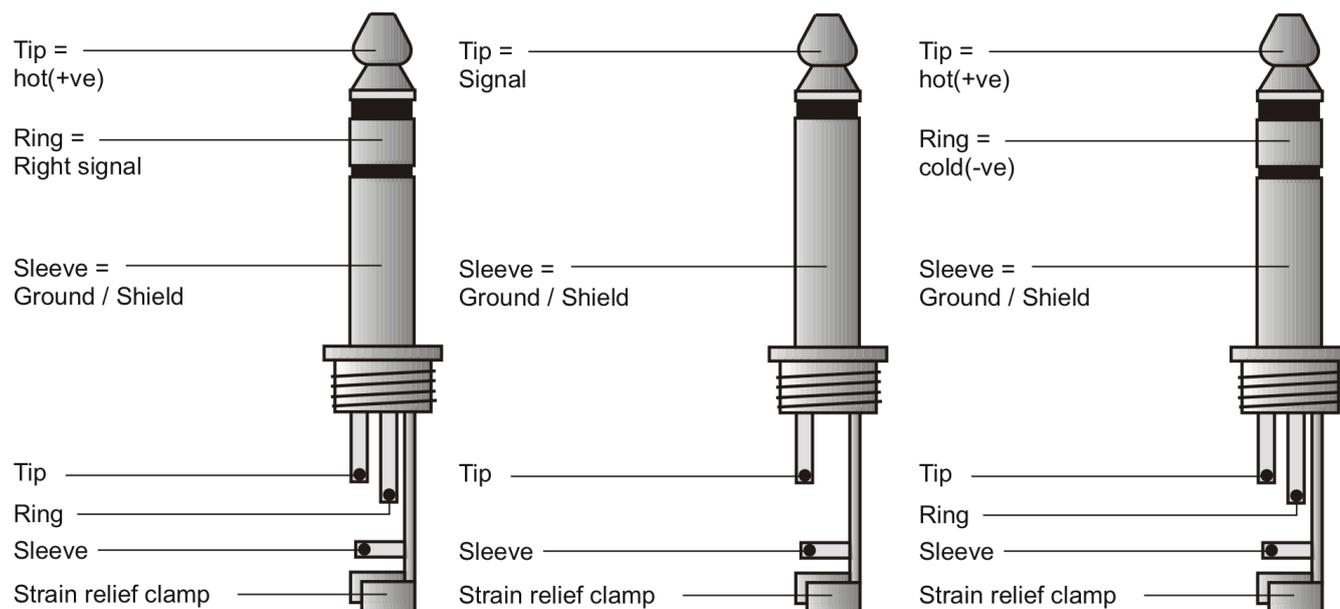

Compensation of interference with balanced connections

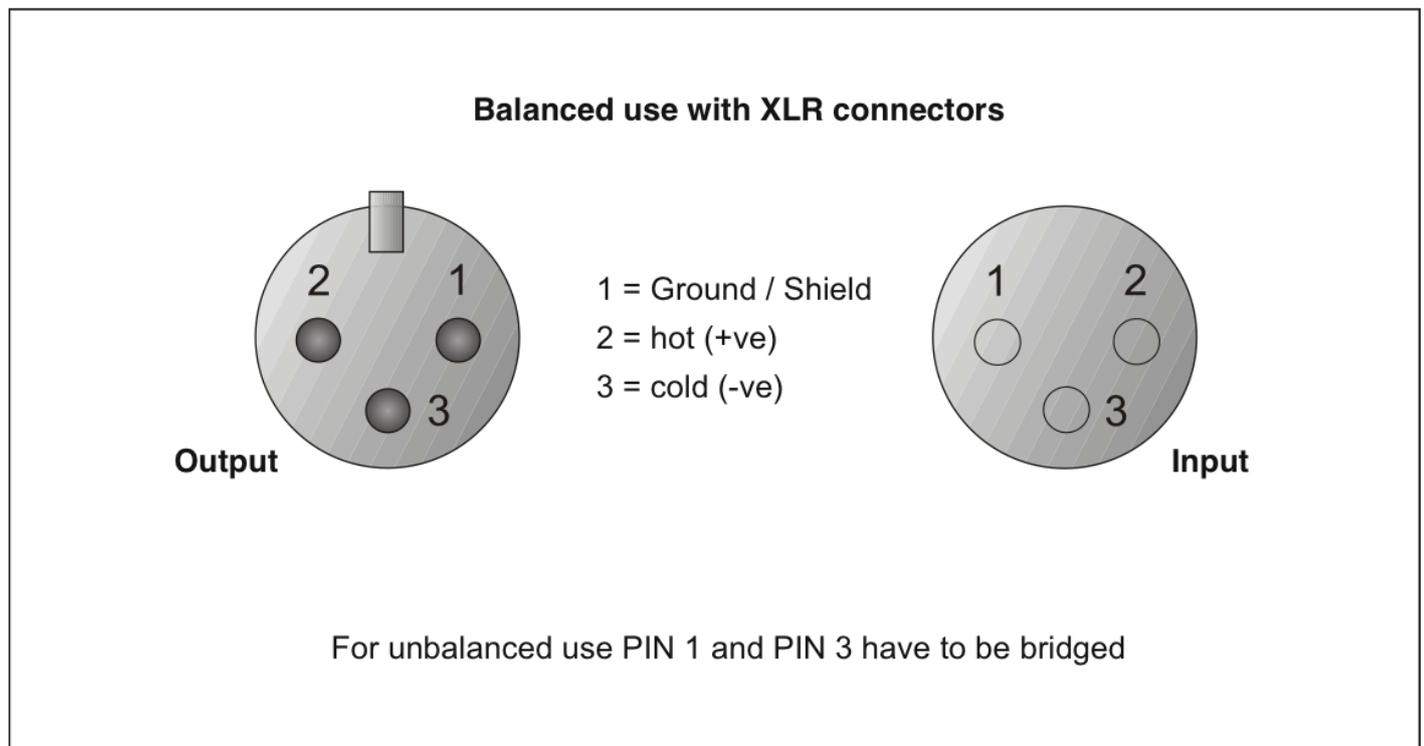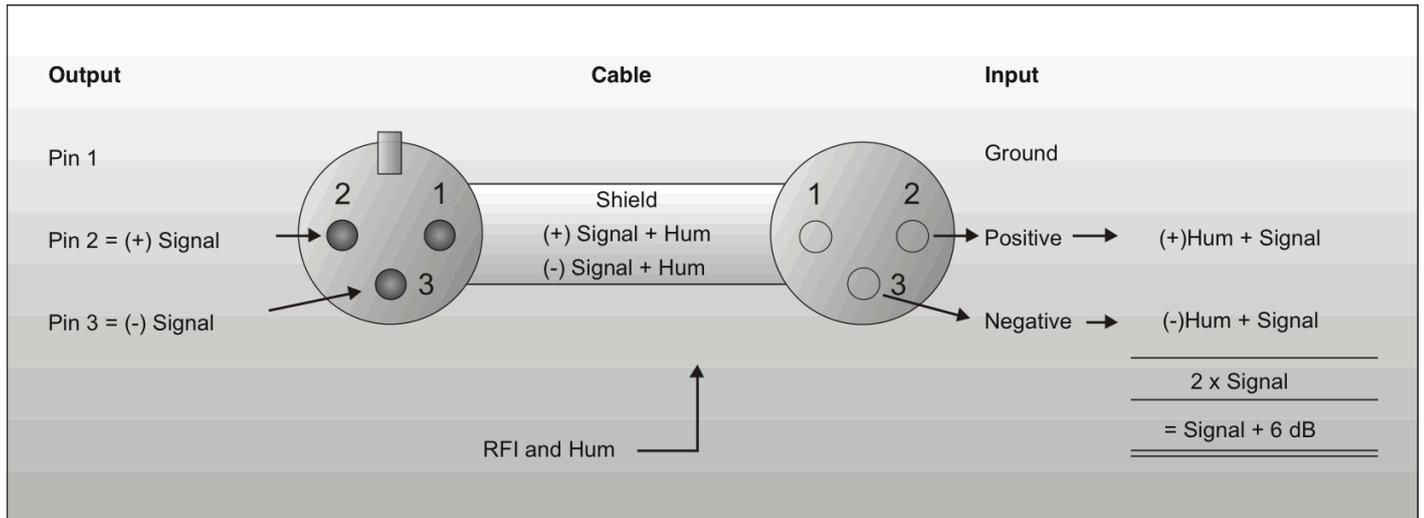

Maintenance

The DAP Audio HM-30 requires almost no maintenance. However, you should keep the unit clean. Disconnect the microphone and then wipe the cover with a damp cloth. Do not immerse in liquid. Do not use alcohol or solvents.

Product Specifications

Model:	DAP Audio HM-30
Type:	Dynamic, moving coil
Frequency response:	40-16.000 Hz (-3dB)
Polar pattern:	Cardioid
Sensitivity:	1,2 mV/Pa -58dB
Max SPL:	140 dB
Impedance:	220 Ohms
Power supply:	none
Microphone connector:	3-pole XLR male
Dimensions microphone:	Ø58 mm x 77 mm
Weight mic:	0,480 kg
Weight case:	0,900 kg



Design and product specifications are subject to change without prior notice.



Website: www.Dap-audio.info
Email: service@highlite.nl



© 2011 Dap Audio.